


Meet Moniteur du Vin

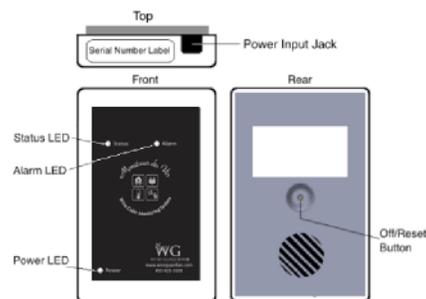

1 START HERE Register your Moniteur du Vin

Go to www.moniteurduvin.com

- Click on [Create Account](#) near top right of home page
- Follow instructions for setting up a new account
- Select "Add New Device"
- Enter Serial # (from label on top of unit), name & location
- Accept or change Temperature, Humidity ranges
- Set up notifications (What you want Moniteur du Vin to do when an alert condition is detected)
- Enter billing period and credit card info

Once registration is complete, you will receive a confirmation e-mail. You can now plug in your Moniteur du Vin.

2 Picking a location for your Moniteur du Vin

Moniteur du Vin can be plugged into any standard 110V power outlet. **The outlet should be indoors and/or protected from direct contact with the elements (snow, rain, etc.).**

Moniteur du Vin will monitor the temperature and humidity levels in the area it is placed. It also checks to make sure that the outlet it is plugged into has power. If it detects a temperature or humidity reading which is outside of the range you set during the unit registration, or the power to the outlet it is plugged into goes out, it will immediately connect to the Wine Guardian servers and send out alerts as directed in the notification schedule you setup.

When selecting an outlet, stay away from a location which gets direct sunlight which could also effect the readings taken. In addition, you should also select an outlet which is not located near any sources of heat or cold (large windows, heating/cooling vents, fireplaces, etc.)

3 Initial Power Up Sequence

When your Moniteur du Vin is plugged into a "live" outlet, you should notice the following activity on the LED status light on the front of the unit.

1. If there is power to the outlet, the status light will immediately come on as a solid yellow for 3-5 seconds during initialization.
2. After initialization the power light should change to a blinking green to signal it has established a connection with the nearest cell tower and is registering with the server.
3. After 20 seconds to 1 minute, the LED power light should

turn to a steady green light signaling it has registered with the Wine Guardian server and it is ready to begin monitoring the environment & reporting alerts.

If after a minute or two if you do not get a solid green light but instead get some other colors or blinking light pattern, refer to the chart of "LED Light Sequence Meanings" on the following page.

IMPORTANT NOTE: No temperature or humidity alerts will be sent out in the first 30 minutes after your Moniteur du Vin is first plugged in as the sensors get used to their new environment & stabilize. Power interruption alerts will be sent out during this period.

4 Testing your Moniteur du Vin

The simplest way to determine if Moniteur du Vin is fully operational, communicating with the Wine Guardian server and your alerts are properly set is to perform the following test. This test should only be done once the unit has been registered and the unit is plugged into a live wall outlet and the status light on the Moniteur du Vin is on and solid green. To test the unit, simply unplug it from the wall for 30 seconds. This will have the same effect as a power outage. Moniteur du Vin will detect that power has been lost. It will then connect to the Wine Guardian server and send out a "power outage" message to all the alerts you have previously set-up for Power. Depending on several factors, these alerts may take up to a minute or two to arrive. Then plug your device back into the AC outlet after the test and you will receive a power restored alert.

Changing the Alert Settings and Notifications

You can change the "safe" temperature and humidity ranges at any time and from any where in the world with an internet connected computer or smart phone. Simply go on the Wine Guardian website at www.moniteurduvin.com, login and select "My Devices". Then select the "Settings" icon. Here you will be able to make changes to the safe ranges as well as add, delete or modify your notification preferences.

Moving or Turning off the unit

You can move Moniteur du Vin anytime should you want to monitor a different room, area or property. For example, to move Moniteur du Vin to a new location, you would simply unplug it into a different outlet in the area you would like to monitor. If Moniteur du Vin is unplugged for more than 10 seconds, it will transmit a "power lost" signal to our server and notifications will be sent out accordingly.

If you are unplugging Moniteur du Vin for a long period of time (such as at the end of the winter season or to re-locate it to a different property), you can turn it off by gently depressing the "off" button located on the back of the unit, above the label. After unplugging the unit and within 8 seconds, use your finger to momentarily depress the button for at least one second. The LED lights on the front of the unit should turn off. If this button is pressed within 8 seconds of unplugging the unit, the "power out" alert will also be eliminated.


Resetting your Moniteur du Vin Unit

Your Moniteur du Vin unit has been manufactured to provide years of trouble-free operation. On rare occasions if you notice that it has gotten into a strange mode or has stopped reporting, you may reset the device. Use the following procedure: Unplug the unit from the outlet. Gently press and hold (for more than 5 seconds) the "off/reset" button located on the back of the unit, above the label. Use your finger or the eraser of a pencil to gently press and hold the button. The LED lights on the front of the unit should turn off. Plug Moniteur du Vin back in to resume normal operation.

LED Light Sequence Meanings in order to make Moniteur du Vin as easy to use as possible, we put everything into one simple package. There are no external probes, complicated displays, antennas, switches or cables to deal with. Three LEDs on the unit indicates the current status of the device. Use the table below to interpret these Led status.

#	Light Sequence	Meaning	Notes / Action
1	Yellow / Status	Unit detects power at outlet and is initializing	Normal start up when unit first plugged in
2	Green / Power Blinking (at start up)	Unit connected with cell tower & registered with server	Stage two of start-up sequence
3	Solid Green / Power	Unit is working normally - monitoring environment	Standard general monitoring mode
4	Quick Flashing Green/Power	Unit is reporting data to the server	Upload of hourly data or alert
5	Slow Flashing Green/Power	No power at outlet but unit still monitoring	Running on battery power
6	Solid Red/Alarm	No cellular reception	Try different outlet for better reception
7	Red/Alarm & Yellow/Status Alternating Flash	Either Unit not registered but connection with cell tower and server established -or- unit is registered but connection subscription has expired or been cancelled	Go to www.SensoredLife.com and register unit or update connection plan. No alerts will be sent.
8	No light	Either "off" button pressed or unit has been without power and battery has run out	Restore power to outlet to resume monitoring function
9	Alternating Green/Power and Yellow/Status Flash	New Firmware being downloaded to unit or unit is retrying a cellular call.	DO NOT UNPLUG during this process
10	Solid Yellow / Status	Unit is in "Do not Call Mode" because cellular subscription is suspended or unit in off-season mode	Renew your subscription online to start receiving notifications

For US Operation Only

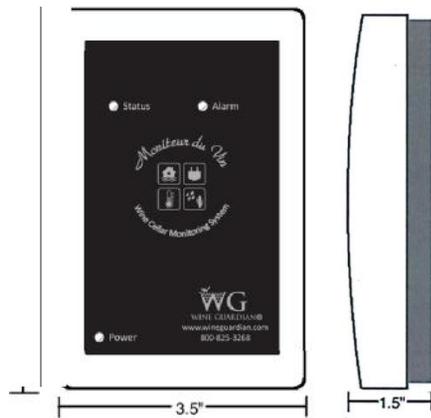

Moniteur du Vin	SPECIFICATIONS
Dimensions	5.80" Tall x 4.50" Wide x 1.50" Deep
Model Number:	WG-500
Power Input	DC, 5V @ 2A
Battery Type	Internal Li-Ion (Not changeable by user), MUST BY DISPOSED OF PROPERLY
Battery Duration	24-48 Hours Typical when fully charged
Operating Range	Temp: 10 to 110 degrees F. Rel. Humidity: 10 to 95%, non-condensing
Alarm Conditions	Temperature (out of range) Humidity (out of range) Power (change in status)
Notification Types	Email Text Message Phone Call (North America)
Number of Notifications	9
Communication Technology	Cellular - CDMA
Monitoring Frequency	Constant
Historical Data Recording Frequency	Hourly
Historical Data Upload Interval	3 times per day typical
Wireless External Sensor (optional) Communication	915MHz, proprietary protocol, 16 external sensors max (depending on type of sensors)

U.S. Patent No. 4,910,454
Copyright 2015 Wine Guardian

Part No. 15H0173-00

Moniteur du Vin

Cellular Connected
Temperature Humidity Power
Wine Cellar Alarm



Quick Start Guide

Model: WG-500

Caution: Before registering, plugging in, or using your Moniteur du Vin for the first time, please read the important legal and safety information in this guide. Failure to follow these safety instructions could result in fire, electric shock, or other injury or damage to Moniteur du Vin or other property.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

This device contains a Lithium-Ion battery and must be recycled or disposed of properly and in accordance with the national collection and recycling schemes operated by your local or regional authority.

For US Operation Only

Congratulations!

Introducing Moniteur du Vin, the simplest, yet most powerful, CELLULAR connected Temperature, Humidity & Power Wine Cellar Monitor available today. Moniteur du Vin has tons of features designed to protect your Wine Cellar as well as put your mind at ease.

- Monitors temperature, humidity and power
- Allow remote setting & changing of safe ranges
- Instantly alerts you in the event of an issue
- Alerts can be via email, text or phone calls
- Uses internal cell phone chip to connect to Wine Guardian servers
- No phone line or internet required in property being monitored
- Has internal, self-charging Lithium-Ion battery to keep on monitoring for days in the event of a power outage
- Records hourly data for later viewing on web site
- Fully self-contained and ready to work

Write Serial Number Here:

LIMITED WARRANTY
Wine Guardian LLC, hereby warrants that it will repair or replace, at its option, any part of the Moniteur du Vin Temperature, Humidity and Power Alarm (hereafter known as Moniteur du Vin), which proves defective by reason of improper workmanship or material, free of charge for parts and labor, for a period of one year from the date of original purchase by the buyer. This warranty does not apply if, in the sole opinion of Wine Guardian, Moniteur du Vin has been intentionally damaged due to misuse, neglect, improper packing, shipping, modification or servicing by other than Wine Guardian, or personnel authorized by Wine Guardian. For information on how to obtain service under this warranty contact the dealer where your Moniteur du Vin was purchased, or contact Wine Guardian via our website at www.moniteurdvin.com.

LIABILITY DISCLAIMER STATEMENT
Wine Guardian, LLC (hereafter known as Wine Guardian) makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Wine Guardian assume any liability arising out of the application or use of any product, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Wine Guardian products are not designed, intended, or authorized for use as components in life support systems, or for any other application in which the failure of the Wine Guardian product could create a situation where personal injury or death or significant financial loss may occur.

Should any person or persons purchase or use Wine Guardian products for any such unintended or unauthorized application, that person or persons shall indemnify and hold Wine Guardian, and its officers, employees, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of property damage, personal injury, death or financial loss associated with such unintended or unauthorized use, even if such claim alleges that Wine Guardian was negligent regarding the design or manufacture of the product in question.